


Connecting via Bluetooth

Use this product as an access point to connect Bluetooth devices such as a smartphone and tablet to the Internet. It is efficient for saving the battery.
Up to seven devices can be connected to the product via Bluetooth. (For pairing, up to 10 devices can be registered.)
However, depending on the ambient reception environment, the number of connected devices may not reach the limit.
Also, the wireless LAN (Wi-Fi*) function and the Bluetooth function cannot be used simultaneously.

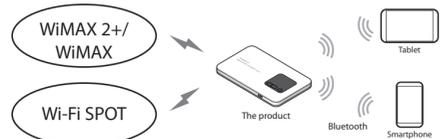

- If Bluetooth is disconnected after pairing, tap the Bluetooth device name of this product on the Bluetooth-equipped device screen to reconnect.
- When the number of paired devices reaches the limit, "Registration limit. Delete the pairing information." appears on the display. In that case, delete pairing information displayed in "Bluetooth Pairing Info" on "Bluetooth Settings" in the screen of the Quick Setting Webpage.

Checking the Devices

- Your Bluetooth-equipped device supports Bluetooth 2.1 or later.
- Your device supports the profile (PANU) which can connect to the Internet.

For the smartphone models that support PANU, see the manufacturer's website.

Preparing for the Connection

Taking a Note of Bluetooth Device Name

- In the normal display, press the SELECT button a few times, select [Terminal Info] in the menu and press the SET button.
- Press the SELECT button to display [Bluetooth Device Name].
The Bluetooth device name of this product is displayed in "Bluetooth Device Name".
Bluetooth Device Name
Memo

Turning Bluetooth "ON"

- In the normal display, press the SELECT button a few times, select [LAN Selection Wi-Fi/Bluetooth] in the menu and press the SET button.
- Select [Bluetooth] with the SELECT button, and press the SET button.
- Check that [ON] is displayed in the normal display.

Configuring the Connection Information

Smartphone / Tablet (Android)

- In the normal display, press the SELECT button a few times, select [Bluetooth Pairing Setting] in the menu and press the SET button.
- Select [YES] with the SELECT button, and press the SET button.
The message "Wait for Pairing" is displayed on the product.
- Tap [設定 (Settings)] - [Bluetooth] on your Bluetooth-equipped device and set to "ON".
- On your Bluetooth-equipped device, tap the Bluetooth device name of this product which has been checked in advance.



- Check that "***** Start Pairing" is displayed on this product.
* The Bluetooth-equipped device information, such as the model name, is indicated in "*****".

- Tap [ペア設定する (Pairing)] on your Bluetooth-equipped device.
The displayed item may vary depending on the Bluetooth-equipped device.
- Select [YES] with the SELECT button, and press the SET button.
- The message "Pairing Setting succeeds." is displayed on the product.
* If "Pairing Setting fails." is displayed, resume the Step 1.

- On your Bluetooth-equipped device, tap the Bluetooth device name of this product.
If the device cannot be connected to the Internet, tap the icon on the right side of the device name to check that Internet Access (*) is marked.
(*) Screen display may be different depending on the Bluetooth-equipped device.



- Check that a value of "1" or more is displayed under [B] in the product display.
* This number indicates the number of connected devices.

iPad/iPod touch

* This function is unavailable as iPhone does not support PANU. (As of January 2015)

- In the normal display, press the SELECT button a few times, select [Bluetooth Pairing Setting] in the menu and press the SET button.
- Select [YES] with the SELECT button, and press the SET button.
The message "Wait for Pairing" is displayed on the product.
- Tap [設定 (Set)] - [Bluetooth] on your Bluetooth-equipped device and set to "ON".
- On your Bluetooth-equipped device, tap the Bluetooth device name of this product which has been checked in advance.



- Check that "***** Start Pairing" is displayed on this product.
* The Bluetooth-equipped device information, such as the model name, is indicated in "*****".

- Select [YES] with the SELECT button, and press the SET button.
- The message "Pairing Setting succeeds." is displayed on the product.
* If "Pairing Setting fails." is displayed, resume the Step 1.

- Check that "***** 接続済み (Connected)" is displayed on your Bluetooth-equipped device.

- The Bluetooth device name of this product is indicated in "*****".



- Check that a value of "1" or more is displayed under [B] in the product display.
This number indicates the number of connected devices.

Display Menu Operations

Various configurations can be performed and information can be confirmed by operating menus with the SELECT/SET buttons in the display. The screen displays are examples of some of the configurations.

Setting Mode


While the display is turned on, using the SELECT/SET buttons switches the screen as follows.

- Switched by pressing the SELECT button
 - Returns to normal display when the POWER button is pressed while switching menus.
- Switched by pressing the SET button
- Switched by holding down the SET button
- Switched automatically






























<Setting Menu>

[Normal Display]

If the display has been turned off, press the POWER button to display the screen.




[Switching between WIMAX 2+/WIMAX and a Wi-Fi SPOT]
This menu is displayed when the "Wi-Fi SPOT" is set to "Enable" in the Quick Setting Webpage. When the product is connected to a Wi-Fi SPOT, "Wi-Fi" is displayed.



Displayed Information

◆ Normal display

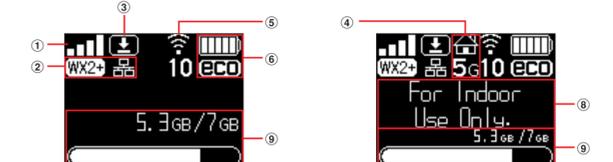

◆ Idle state display



Name	Indicator	Status	Explanation
1) Reception level	[Signal strength icon]	Illuminating	Indicates the signal strength of WIMAX 2+ in 5 levels
2) Connection status	[Wimax 2+ icon]	Illuminating	Indicates the signal strength of WIMAX 2+ / Wi-Fi SPOT in 6 levels
	[Wimax 2+ icon]	Illuminating	Indicates that the product is connected to the Internet with WIMAX 2+
	[Wi-Fi icon]	Illuminating	Indicates that the product is connected to the Internet with Wi-Fi SPOT
	[Wi-Fi icon]	Blinking	Indicates that a connection to the Internet is trying to be established with Wi-Fi SPOT
	[Wi-Fi icon]	Illuminating	Indicates that the device is outside the WIMAX 2+/WIMAX Wi-Fi SPOT service area
	[Wi-Fi icon]	Illuminating	Indicates that the product is connected to the cradle (sold separately) with wireless LAN access point mode, and connected to the Internet
	[Wi-Fi icon]	Illuminating	Indicates that LAN is connected via USB
	[Wi-Fi icon]	Illuminating	Indicates that the product is connected to the cradle (sold separately) and wired LAN
3) Firmware update notification	[Firmware update icon]	Illuminating	Indicates that the new firmware is released and update is required
4) Wireless LAN (Wi-Fi*) band	[Wi-Fi band icon]	Illuminating	Indicates that the product is connected to the 5GHz band (outdoor)
	[Wi-Fi band icon]	Illuminating	Indicates that the product is connected to the 2.4GHz band (indoor)
5) Wireless status on LAN side	[Wi-Fi band icon]	Illuminating	Indicates that the wireless LAN (Wi-Fi) on the LAN side is ON (the number below indicates the connected devices)
	[Wi-Fi band icon]	Blinking	Searching the wireless LAN (Wi-Fi) band
	[Wi-Fi band icon]	Off	Indicates that the wireless LAN (Wi-Fi) on the LAN side is OFF
6) Battery status	[Battery icon]	Off	Indicates that Bluetooth is OFF
	[Battery icon]	Illuminating	Indicates the remaining battery level on a scale of 6 levels
	[Battery icon]	Illuminating	Appears under the battery icon while Energy-Saving is set
7) Idle state	[Zz icon]	Illuminating	Provides an approximate visual indication of the remaining battery level while charging
	[Zz icon]	Animation	Indicates the idle state (appears when the POWER button is pressed while charging)
8) Messages	[Messages icon]	Illuminating	Indicates various messages
9) Data communication amount	[Data communication amount icon]	Illuminating	Indicates when the data communication amount is set

Product Specifications

Main Unit	
Physical dimensions (W x H x D)	Approx. 109 (W) x 66 (H) x 9.0 (D) mm
Weight	Approx. 97g
Interface	USB 2.0 High Speed (microUSB terminal) *1
Display	Compliant with Bluetooth 4.0 Wireless Technology
Power supply	Organic electroluminescence display (monochromatic), approx. 1.0 inch
Battery pack	DC 5V 1.5A
	Lithium ion, 3.8V, 2500mAh
Continuous standby time *1	Waiting state: Approx. 35 hours
	Idle state (Remote start not available): Approx. 400 hours
	Life state (Remote start not available): Approx. 450 hours